




SPV 100-A

Solar Powered Vent Flare



Standard Flare Features:

- Self Contained Solar Spark ® Vent Flare System for Gas Flows from 5-140 SCFM (8.5-240 NCMH)
- 12 Volt DC Low Vacuum Ignition Protected Blower
- 270 Watt Solar Power System
- Automatic Shutoff Valve for Flame-out Conditions
- Fail Safe Shutdown if System Voltage Goes Too Low
- Flare Temperature Data Logger Records Thermal History
- NEMA 4 Weatherproof Enclosure

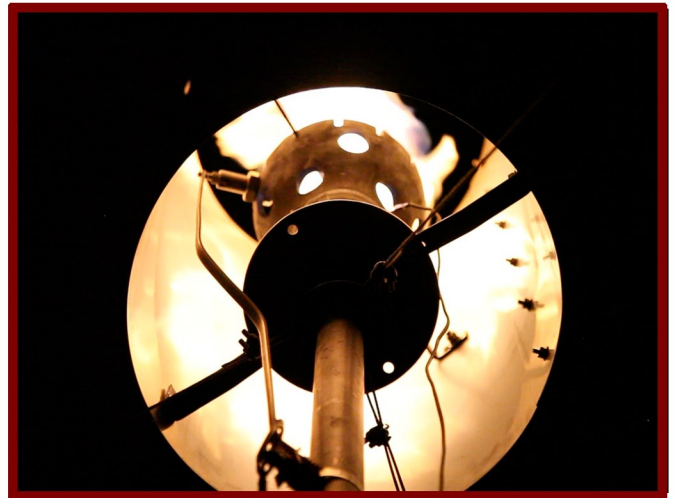

www.LTLbiogas.com

Contact Us: sales@LTLbiogas.com
435-986-8245